

HANDI-MOVE MODEL 2500

2500 SERIES MOTOR TRACK SYSTEMS

The SureHands® 2500 series motor takes you where you want to go



SUREHANDS®



- Lifts from the floor
- Emergency down feature
- Independent transfers possible with the **SUREHANDS®** Body Support
- Accommodates conventional slings
- Manual control and / or control panel
- Infra-red wireless remote control available
- Automatic stop at any desired spot
- Fits into every environment
- Smooth stop and go
- Various track options make it possible to access all areas



SUREHANDS®

SPECIALISTS IN INNOVATIVE AND RELIABLE LIFT & CARE SYSTEMS




TECHNICAL SPECIFICATIONS

DIMENSIONS AND SPECIFICATIONS

Safe working load:440 lbs / 200 kg (118.11 Inch / 3000 mm motorband: 352.74 lbs / 160 kg)
 Batteries: 2 x 12 V rechargeable, 9.5 Ah
 Standard motor band length: 78.7 Inch / 2000 mm (Option: 118.11 Inch / 3000 mm)
 Distance between rail and swivel hook:7.5 Inch / 190 mm
 Rail system: aluminum, lacquered in white
 Smooth stop and go:..... electronic
 Cover: ABS
 Emergency down:..... mechanical
 Emergency stop:..... present
 Number of lifts with fully charged batteries: 160

EXAMPLE OF A ROUTE

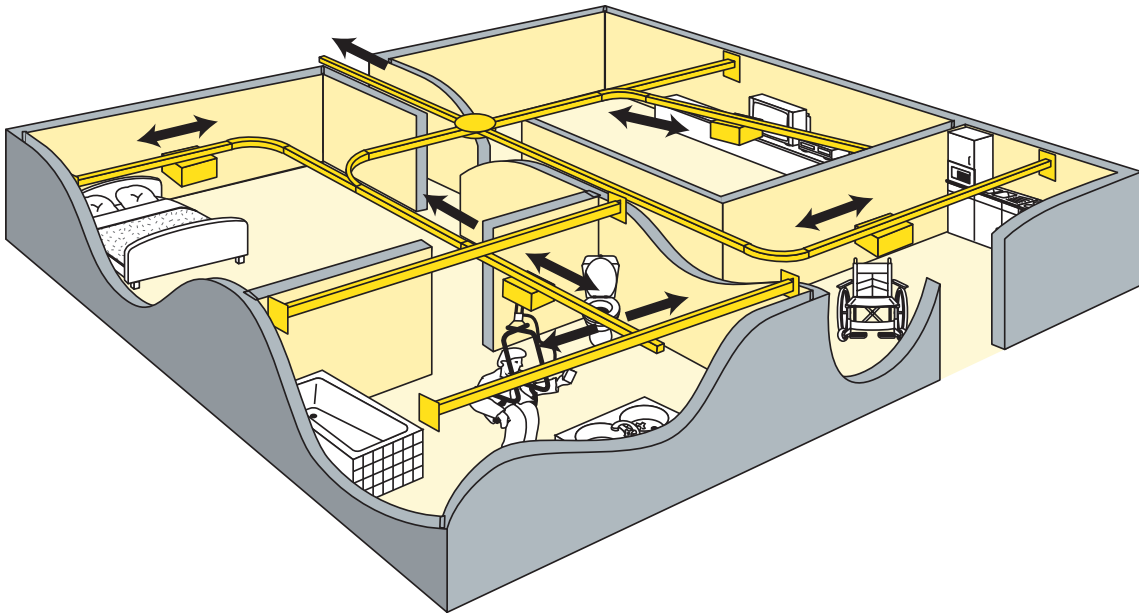

AVAILABLE IN 4 DIFFERENT VERSIONS:

1. HM2500 (ref 2500):
lifting motor (only up and down) with pneumatic handcontrol.
2. HM2500 RC (ref 2505):
lifting motor (only up and down) with infra-red wireless remote control.
3. HM2500 L (ref 2510):
lifting and lateral motor (up and down, left and right) with pneumatic handcontrol. Not available in 660 lbs / 300 kg version.
4. HM2500 LRC (ref 2515):
lifting and lateral motor (up and down, left and right) with infra-red wireless remote control. Not available in 660 lbs / 300 kg version.

Local Representative: